

UNIT : mm
UNLESS OTHERWISE SPECIFIED
ASSY LENGTH TOLERANCE

- < 150mm = ±10
- ≥ 150mm and < 250mm = ±15
- ≥ 250mm and < 500mm = ±20
- ≥ 500mm and < 1000mm = ±30
- ≥ 1000mm and < 5000mm = ±50
- 5000mm and above = ±100

PBOLT-16 (Rev01)


RoHS COMPLIANT

BILL OF MATERIALS

Item	Description
1	RJ45 (W14), 8P8C Fully Shielded Moulded Plug <BLK>
2	[OD=6.4mm] <BLK>
3	RJ45 Hsl 8P8C Fully Shielded Moulded Plug <BLK>
4	Cable Label
5	Heat Sealed PE Bag

Phone +66 87 803 1661 | www.imRNasia.com | sale@imRNasia.com

WIRING DIAGRAM

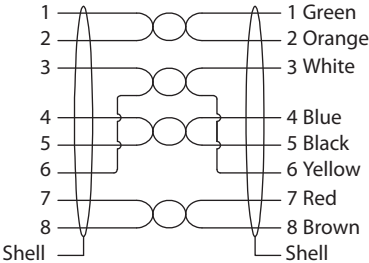

Note: All the Pair Shield connect to B.Shield

PACKAGING DETAIL

