


Standard Telecentric Lens

Model		VS-TC1-150CO			
Optical Mag.		× 1.0 ± 5 %			
FOV (V x H)	2/3"	-			
	1/2"	4.8	×	6.4	mm
	1/3"	3.6	×	4.8	mm
WD		156.2 mm ± 5			
O/I (Object & Imager Distance)		306.2 mm			
Working F/#		13.0			
NA		0.038			
DOF at PCoC ϕ 0.04mm		1.0 mm			
TV Distortion (1/2")		0.01 %			
Relative Illuminance (Y=4)		99 %			
Wavelength		Visible			
Mount		C-Mount			
Flange Back		17.526 mm			
Sensor Size (max.)		1/2"			
Co-Axial Prism		Built-in			
Filter Thread		M 22.5 P= 0.5			
Weight (approx.)		82 g			
Dimension		ϕ 30 (max.) × L = 132.5 mm			

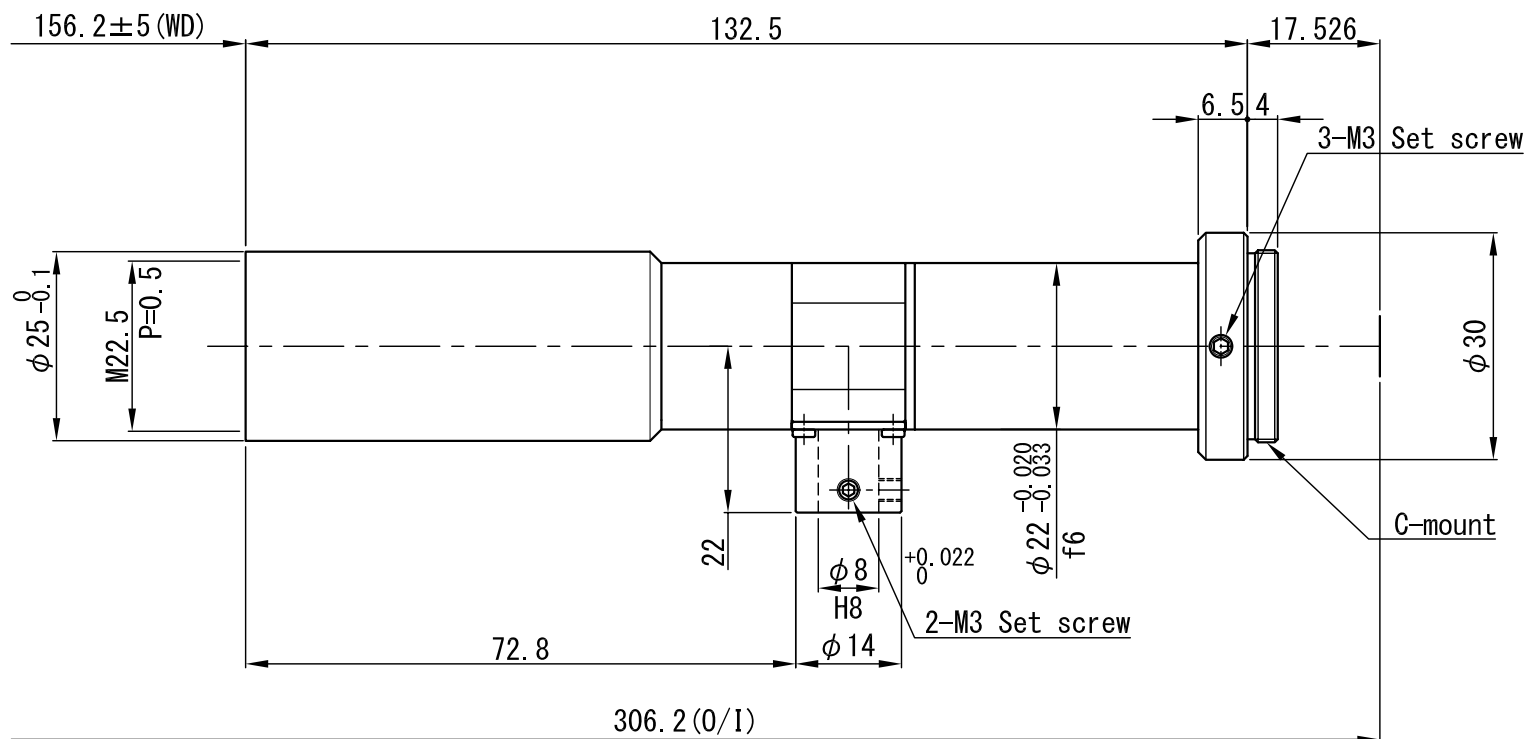

△				APPROVED	CHECKED	MATERIAL 材料	-	CHAMFER 一般面取	-	QUANTITY 個数		
△				T. A.	T. A.	TREATMENT 処理	-	FINISHING 仕上	-	-		
△						TREATMENT CONTACT 処理接点	-	DECENTRATION 偏芯	-			
△				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3 ±0.5 ±1.0 ±0.2	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)		
△				T. A.	M. Y.	OVER 63 UP TO 250	±0.2 ±0.3 ±0.6 ±0.15	UNIT (mm)	-	VS-TC1-150C0		
△						OVER 16 UP TO 63	±0.1 ±0.2 ±0.4 ±0.1	SCALE	1 / 1		NAME	外觀図
△						OVER 0 UP TO 16	±0.05 ±0.1 ±0.2 ±0.1	DATE	'11.05.10		DRAW NO.	0 D T C 0 4 4 9 A 1
	DATE	EXCH NO.	REVISION 変更記事			TOLERANCES	Ⓐ B C S					