


Standard Telecentric Lens

Model		VS-TC6-65			
Optical Mag.		× 6.0 ± 5 %			
FOV (V x H)	2/3"	1.2	×	1.4	mm
	1/2"	0.8	×	1.1	mm
	1/3"	0.6	×	0.8	mm
WD		64.3 mm ± 2			
O/I (Object & Imager Distance)		162.5 mm			
Working F/#		43.1			
NA		0.070			
DOF at PCoC ϕ 0.04mm		0.1 mm			
TV Distortion (2/3")		0.00 %			
Relative Illuminance (Y=5.5)		100 %			
Wavelength		Visible			
Mount		C-Mount			
Flange Back		17.526 mm			
Sensor Size (max.)		2/3"			
Co-Axial Prism		-			
Weight (approx.)		43 g			
Dimension		ϕ 31 (max.) × L = 80.7 mm			

品番	品名	材料	個数	記事
----	----	----	----	----

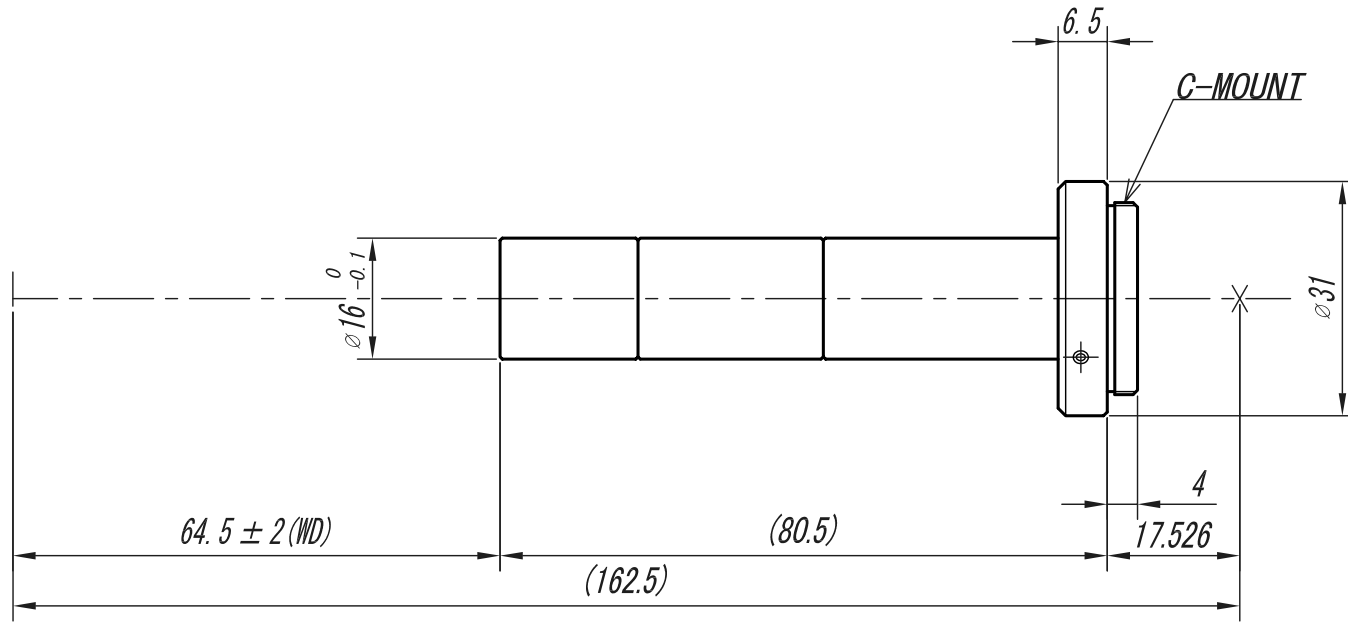

△				APPROVED	CHECKED	MATERIAL 材料				FINISH/ROUGHNESS 仕上程度				HEAT TREATMENT 熱処理		SURFACE TREATMENT 表面処理		QUANTITY 個数
△				J. A.	T. A.													
△				DESIGNED	DRAWN	OVER 250 UP TO 1000	±0.3	±0.5	±1.0	±0.2	UNIT (mm)	ANGLE 角度	METHOD 図法	REMARK 適用 (機種名)				
△						OVER 63 UP TO 250	±0.2	±0.3	±0.6	±0.15				VS-TC6-65				
△				T. T.	T. M.	OVER 16 UP TO 63	±0.1	±0.2	±0.4	±0.1		SCALE	1 / 1	NAME	外觀圖			
	DATE	EXCH NO.	REVISION 変更記事			TOLERANCES	A	B	C	S	DATE	'05.02.03	DRAW NO.	ODTC0021A1				